
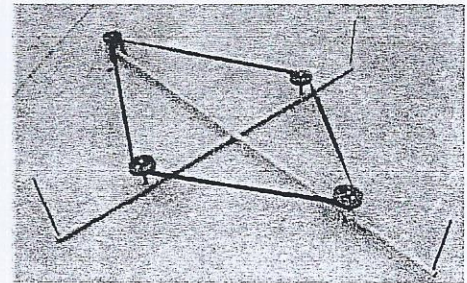
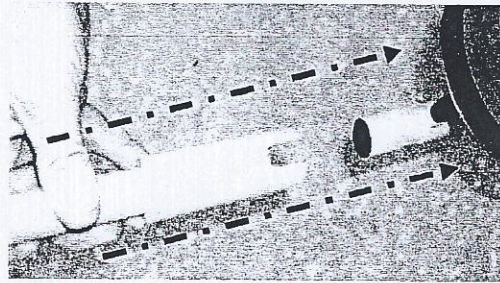


### 3. Attaching Buoyant Connecting Rods to Machine Axis Extension Arms assemblies to the DuxTrac Machine




Make sure the "flats" of the nuts that hold the belt pulleys of the DuxTrac machine are "in-line" with the axis tubes as shown. \*This allows the float extension assembly to clear the pulley nut.

Slip each assembly onto the end of the ends of the DuxTrac machine frame members


### 4. Preparing Buoyant Decoys for Assembly (3 required)




Drill ????? diameter hole in the mid-point of the buoyant decoy's keel.

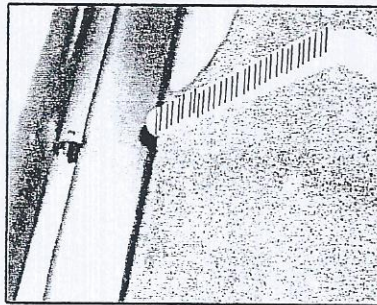

Insert Buoyant Connecting Rod through drilled hole in keel.

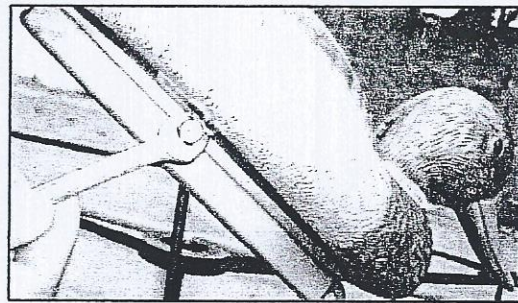

Secure buoyant decoy to connecting rod with the lock nuts that are provided.

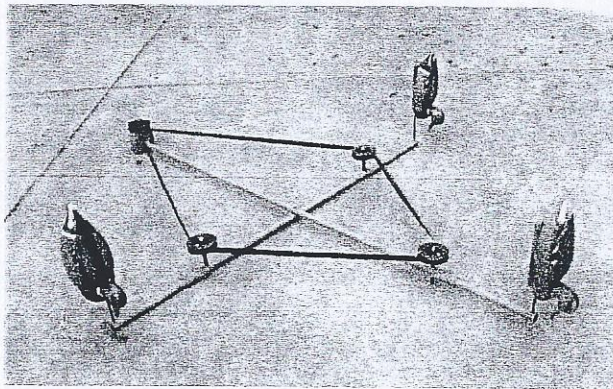

*You're good to go. Have a great season and thanks for making Duxtrac a part of your hunt!*

*Carl Mager*